


CABLE LADDER AND FITTING ACCESSORIES

ALUMINIUM CABLE LADDER

SERIES AS10

STANDARD LENGTH :

3.0 mtr and 6.0 mtr per length

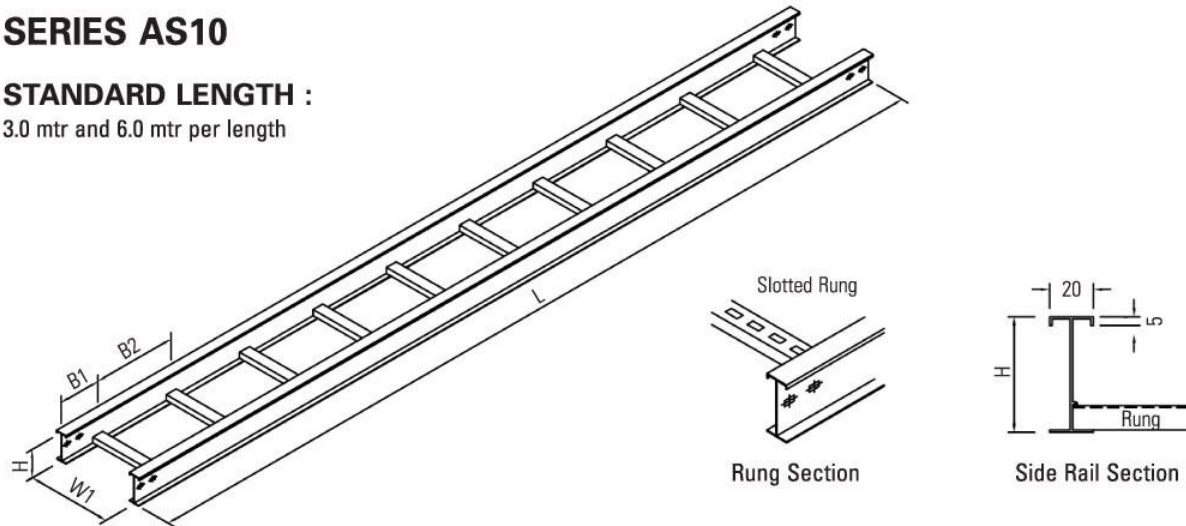


PART NUMBER	W1	H	L	B1	B2	THK	Rung THK	FINISHS
ASL/S10/900/FINISHS	900	100	*3000	150	300	2.0	2.0	Aluminium Extrusion 6061-T6 Alloy (AL). Aluminium with Anodised Coating (ALAC). Aluminium with Epoxy Powder Coating (ALEPC).
ASL/S10/750/FINISHS	750	100	*3000	150	300	2.0	2.0	
ASL/S10/600/FINISHS	600	100	*3000	150	300	2.0	2.0	
ASL/S10/450/FINISHS	450	100	*3000	150	300	2.0	2.0	
ASL/S10/300/FINISHS	300	100	*3000	150	300	2.0	2.0	
ASL/S10/150/FINISHS	150	100	*3000	150	300	2.0	2.0	

SERIES AS15

STANDARD LENGTH :

3.0 mtr and 6.0 mtr per length

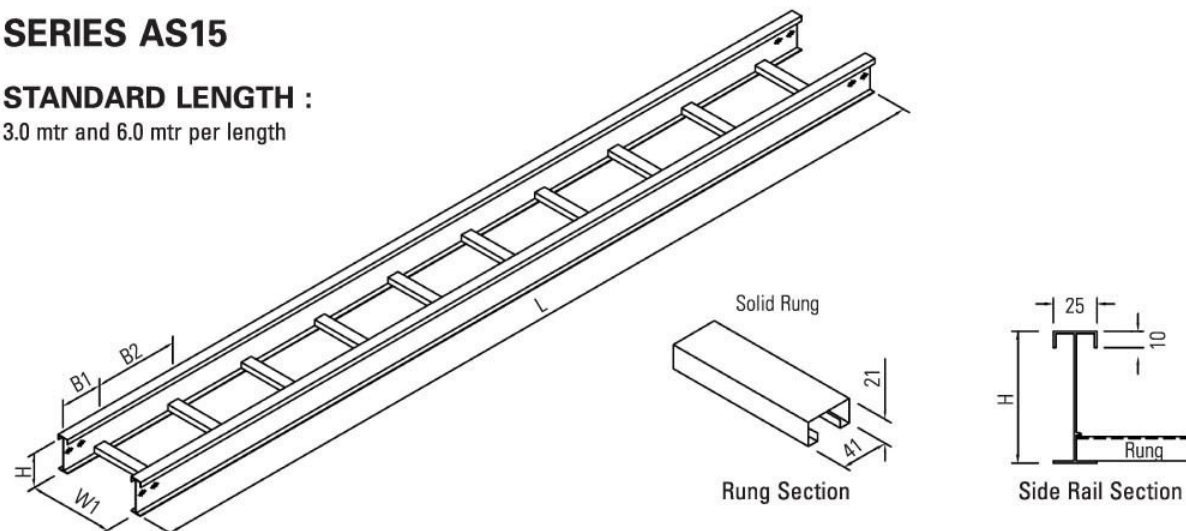


PART NUMBER	W1	H	L	B1	B2	THK	Rung THK	FINISHS
ASL/S15/900/FINISHS	900	150	*3000	150	300	2.0	2.0	Aluminium Extrusion 6061-T6 Alloy (AL). Aluminium with Anodised Coating (ALAC). Aluminium with Epoxy Powder Coating (ALEPC).
ASL/S15/750/FINISHS	750	150	*3000	150	300	2.0	2.0	
ASL/S15/600/FINISHS	600	150	*3000	150	300	2.0	2.0	
ASL/S15/450/FINISHS	450	150	*3000	150	300	2.0	2.0	
ASL/S15/300/FINISHS	300	150	*3000	150	300	2.0	2.0	
ASL/S15/150/FINISHS	150	150	*3000	150	300	2.0	2.0	



ALUMINIUM CABLE LADDER LOAD/DEFLECTION DATA


SERIES AS10 LADDER

Safe load is 214 kg/m at 3.0 mtr span or 53 kg/m at 6.0 mtr span when tested to NEMA standard. Load calculations are based on uniform distributed loads on a 5 span beam. (Safety factor 1.5)

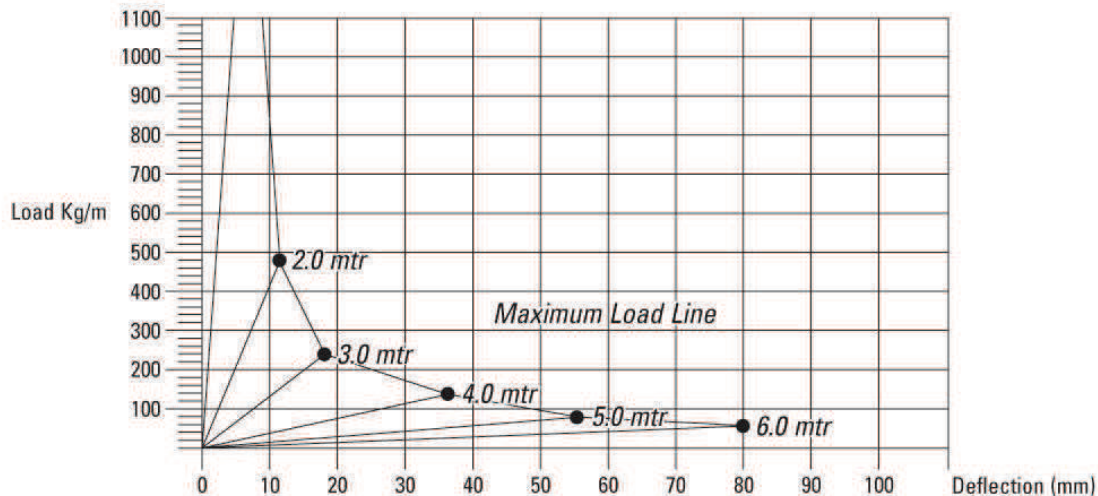

SERIES AS15 LADDER

Safe load is 664 kg/m at 3.0 mtr span or 166 kg/m at 6.0 mtr span when tested to NEMA standard. Load calculations are based on uniform distributed loads on a 5 span beam. (Safety factor 1.5)

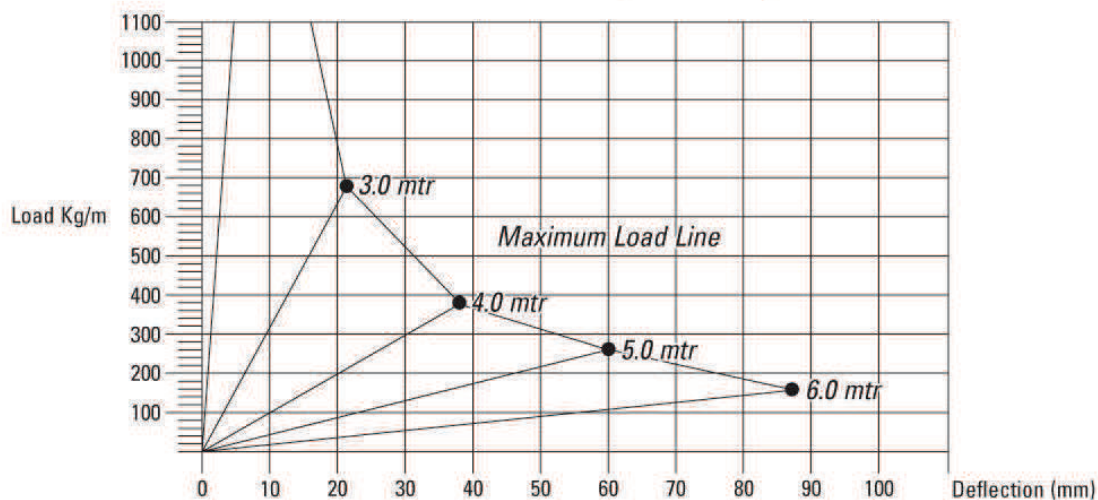

* The above data shown is typical and given for guidance only, no guarantee, responsibility or liability as to its supplied will match the test results exactly.